FAZE
LIGHTING

2025
LED LIGHTING CATALOG

www.fazesolutionsbd.com

About FAZE

Faze Lighting is a forward-thinking lighting solutions provider, committed to redefining the lighting landscape in Bangladesh through smart, sustainable, and design-centric innovation.
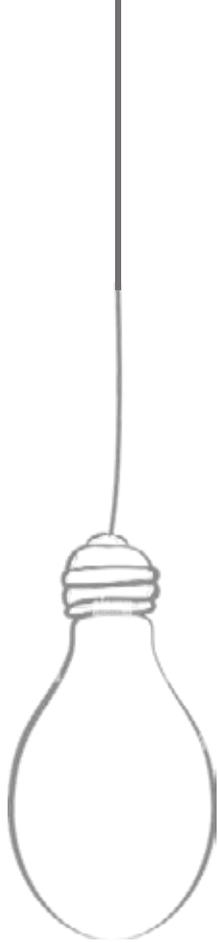
Established by industry veterans with extensive experience in lighting design and automation, our company blends creativity, advanced technology, and technical precision to deliver exceptional outcomes.

Our expertise spans architectural, industrial, and landscape lighting, as well as façade illumination and intelligent DMX-based automation systems. Each project is approached with a bespoke solution, supported by detailed technical calculations, 3D simulations, and comprehensive project execution.

Utilising industry-standard tools such as Dialux Evo, AutoCAD, and advanced 3D visualisation software, we ensure that every design is not only energy-efficient and technically sound but also visually compelling and aligned with the client's vision.

We collaborate with globally recognised lighting brands to ensure the highest standards in product quality, design integrity, and long-term reliability. Our after-sales services are backed by structured warranty programs, including 2-year, 3-year, and 5-year options, ensuring continued support and peace of mind for our clients.

OVER VIEW

FAZE
LIGHTING

F-SDL-1001
7W, 10W

F-SDL-1005
7W, 10W

F-SDL-1003
8W, 12W

F-SDL-1007
12W, 20W, 30W

F-SDL-1011
10W, 15W, 20W

F-SDL-1009
5W, 10W, 15W

F-SDL-1013
7W, 9W

F-SDL-1015
10W, 15W

Surface Down Light

Product Featurers

— Inpute voltage: AC220-240V
— Standard CCT: 2700-7000K
— Color rendering: CRI >80
— Flicker free driver
— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
Bridgelux/Epistar/Sanan/Mulinsan
— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
accroding to the weight, chips & driver brand)

Application Areas

— Office
— Retail Shops
— Hospitals
— Residential
— Commercial

Surface Down Light

F-SDL-1017
5W, 10W

F-SDL-1021
5x2W, 10x2W

F-SDL-1019
12W

F-SDL-1023
7W, 10W

F-SDL-1027
5W, 10W

F-SDL-1025
5W, 10W, 15W

F-SDL-1029
10W, 15W,
10Wx2, 15Wx2

F-SDL-1031
5W, 10W

Product Featurers

— Inpute voltage: AC220-240V
— Standard CCT: 2700-7000K
— Color rendering: CRI >80
— Flicker free driver
— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
  Bridgelux/Epistar/Sanan/Mulinsan
— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
  accroding to the weight, chips & driver brand)

Application Areas

— Office
— Retail Shops
— Hospitals
— Residential
— Commercial

LED CONCEAL DOWN LIGHT

FAZE
LIGHTING

Conceal Down Light

F-CDL-1301
15W, 20W, 30W

F-CDL-1305
2x6W, 2x12W, 2x20W

F-CDL-1303
20W, 25W

F-CDL-1307
20W, 30W

F-CDL-1311
5W, 7W, 12W

F-CDL-1309
10W, 15W, 20W

F-CDL-1313
7W, 12W, 18W

F-CDL-1317
5W, 7W, 10W

F-CDL-1315
5W, 7W, 12W, 20W

Product Featurers

— Inpute voltage: AC220-240V
— Standard CCT: 2700-7000K
— Color rendering: CRI >80
— Flicker free driver
— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
Bridgelux/Epistar/Sanan/Mulinsan
— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
accroding to the weight, chips & driver brand)

Application Areas

— Office
— Retail Shops
— Hospitals
— Residential
— Commercial

FAZE
LIGHTING

Conceal Down Light

F-CDL-1319
2x5W, 2x10W

F-CDL-1321
5W, 7W, 10W

F-CDL-1323
10W, 20W, 30W, 40W

F-CDL-1325
2x10W

F-CDL-1327
7W, 12W

F-CDL-1329
10W, 20W, 30W, 40W

F-CDL-1331
2x5W, 2x7W
2x12W

F-CDL-1333
5W, 7W, 10W

F-CDL-1335
6W, 12W

Product Featurers

— Inpute voltage: AC220-240V
— Standard CCT: 2700-7000K
— Color rendering: CRI >80
— Flicker free driver
— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
  Bridgelux/Epistar/Sanan/Mulinsan
— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
  accroding to the weight, chips & driver brand)

Application Areas

— Office
— Retail Shops
— Hospitals
— Residential
— Commercial

FAZE LIGHTING

LED CEILING LIGHT

FAZE
L I G H T I N G

Ceiling Light

F-CEIL-1601
36W, 72W

F-CEIL-1603
36W, 72W

F-CEIL-1613
36W, 72W

F-CEIL-1605
36W, 72W

F-CEIL-1607
36W, 72W

F-CEIL-1615
20W, 36W

F-CEIL-1609
30W, 40W, 50W
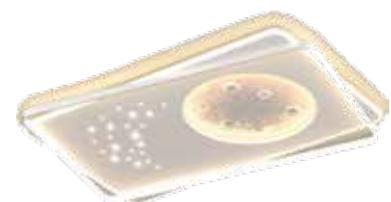
F-CEIL-1611
36W, 50W, 72W

Product Featurers

- Inpute voltage: AC220-240V
- Standard CCT: 2700-7000K
- Color rendering: CRI >80
- Flicker free driver
- IP rating: IP20/IP44/IP54

Chips & Driver

- LED Chips : Philips/Osram/Bridgelux/Epistar/Sanan/Mulinsan
- Driver : Osram/Philips/Done/CE Standard

Warranty

- 1-3 years (Product warranty & price varies accroding to the weight, chips & driver brand)

Application Areas

- Office
- Retail Shops
- Hospitals
- Residential

LED TRACK LIGHT

FAZE
L I G H T I N G

Track Light

F-TRL-1901
10W, 15W, 20W

F-TRL-1903
10W, 15W

F-TRL-1905
9W, 18W, 27W

F-TRL-1907
7W

F-TRL-1909
10W, 20W, 30W

F-TRL-1913
10W, 20W, 30W

F-TRL-1911
5W, 10W, 20W

F-TRL-1915
10W, 20W

Product Featurers

— Inpute voltage: AC220-240V
— Standard CCT: 2700-7000K
— Color rendering: CRI >80
— Flicker free driver
— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
   Bridgelux/Epistar/Sanan/Mulinsan
— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
   accroding to the weight, chips & driver brand)

Application Areas

— Office
— Retail Shops
— Hospitals
— Residential
— Commercial

FAZE LIGHTING

Track Light

F-TRL-1919
20W

F-TRL-1917
9W, 18W, 27W

F-TRL-1921
9W, 18W, 27W

F-TRL-1923
1x10W, 2x10W

F-TRL-1925
10W, 20W,
30W,40W

F-TRL-1927
10W, 20W,
30W,40W

Product Featurers

— Inpute voltage: AC220-240V
— Standard CCT: 2700-7000K
— Color rendering: CRI >80
— Flicker free driver
— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
  Bridgelux/Epistar/Sanan/Mulinsan
— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
  accroding to the weight, chips & driver brand)

Application Areas

— Office
— Retail Shops
— Hospitals
— Residential
— Commercial

LED MAGNATIC TRACK LIGHT

Ultra-Narrow Magnetic Track Light

F-NMTL-2101
6W, 9W, 18W

F-NMTL-2102
9W, 18W, 27W

F-NMTL-2103
6W

F-NMTL-2105
9W, 18W

F-NMTL-2107
9W

F-NMTL-2109
3W

F-NMTL-2111
6W, 12W

F-NMTL-2113
6W, 9W, 18W

Product Featurers

— Inpute voltage: AC220-240V
— Standard CCT: 2700-7000K
— Color rendering: CRI >80
— Flicker free driver
— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
  Bridgelux/Epistar/Sanan/Mulinsan
— Driver : Osram/Philips/Done/CE Standard
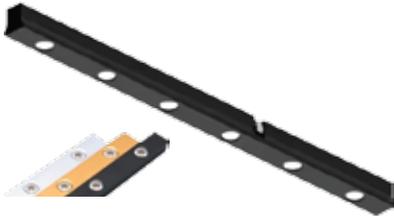
Warranty

— 1-3 years (Product warranty & price varies
  accroding to the weight, chips & driver brand)

Application Areas

— Office
— Retail Shops
— Hospitals
— Residential
— Commercial

FAZE LIGHTING

F-SMTL-2201
6W

F-SMTL-2203
6W, 9W

F-SMTL-2205
7W, 15W

F-SMTL-2207
1x7W, 2x7W

F-SMTL-2209
3W, 6W

F-SNMTL-2211
6W, 12W, 18W

F-SMTL-2213
6W, 12W, 18W

Ultra-Narrow Magnetic Track Light

Product Featurers

- Inpute voltage: AC220-240V
- Standard CCT: 2700-7000K
- Color rendering: CRI >80
- Flicker free driver
- IP rating: IP20/IP44/IP54

Chips & Driver

- LED Chips : Philips/Osram/ Bridgelux/Epistar/Sanan/Mulinsan
- Driver : Osram/Philips/Done/CE Standard

Warranty

- 1-3 years (Product warranty & price varies accroding to the weight, chips & driver brand)

Application Areas

- Office
- Retail Shops
- Hospitals
- Residential
- Commercial

LED HIGHBAY LIGHT

FAZE
L I G H T I N G

Highbay Light

F-HBL-2501
50W, 100W, 150W, 200W

F-HBL-2503
100W, 150w, 200W

F-HBL-2505
50W, 100W, 150W, 200W

F-HBL-2507
200W, 300W, 400w

F-HBL-2509
50W, 80W, 120W, 150W, 200W

F-HBL-25011
50W, 100W, 150W, 200W

Product Featurers

- Inpute voltage: AC220-240V
- Standard CCT: 2700-7000K
- Color rendering: CRI >80
- Flicker free driver
- IP rating: IP20/IP44/IP54

Chips & Driver

- LED Chips : Philips/Osram/ Bridgelux/Epistar/Sanan/Mulinsan
- Driver : Osram/Philips/Done/CE Standard

Warranty

- 1-3 years (Product warranty & price varies accroding to the weight, chips & driver brand)

Application Areas

- Warehouse
- Grocery
- Stores
- Factories
- Manufacturing Plant

LED PENDANT LIGHT

FAZE
LIGHTING

F-PDL-2801
10W, 15W

F-PDL-2805
10W, 15W

F-PDL-2803

F-PDL-2807
5W, 7W

F-PDL-28011

F-PDL-28013
5W, 12W

F-PDL-2809
5W, 7W

Pendent Light

Product Featurers

— Inpute voltage: AC220-240V
— Standard CCT: 2700-7000K
— Color rendering: CRI >80
— Flicker free driver
— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
Bridgelux/Epistar/Sanan/Mulinsan
— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
accroding to the weight, chips & driver brand)

Application Areas

— Office
— Retail Shops
— Hospitals
— Residential
— Commercial

FAZE LIGHTING

Pendent Light

F-PDL-2815
20W
(motion sensor)

F-PDL-2817

F-PDL-2819

F-PDL-2820

F-PDL-2821

Product Featurers

- Inpute voltage: AC220-240V
- Standard CCT: 2700-7000K
- Color rendering: CRI >80
- Flicker free driver
- IP rating: IP20/IP44/IP54

Chips & Driver

- LED Chips : Philips/Osram/ Bridgelux/Epistar/Sanan/Mulinsan
- Driver : Osram/Philips/Done/CE Standard

Warranty

- 1-3 years (Product warranty & price varies accroding to the weight, chips & driver brand)

Application Areas

- Office
- Retail Shops
- Hospitals
- Residential
- Commercial

LED TUBE LIGHT

Tube Light Series

F-TUL-3001
40W

F-TUL-3005
Only shade

F-TUL-3003
40W

F-TUL-3007
20W, 30W, 40W, 60W

F-TUL-3009
20W, 40W

F-TUL-3011
10W, 20W

F-TUL-3013
Only shade

F-TUL-3015
40W

F-T8-3017(glass tube)
20W

F-T8-3019 (complete)
10W, 20W

F-T5-3021 (complete)
9W, 18W

Product Featurers

— Inpute voltage: AC220-240V
— Standard CCT: 2700-7000K
— Color rendering: CRI >80
— Flicker free driver
— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
 Bridgelux/Epistar/Sanan/Mulinsan
— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
 accroding to the weight, chips & driver brand)

Application Areas

— Office
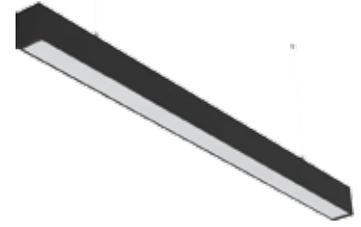— Retail Shops
— Hospitals
— Factories
— Warehouse

LED HANGING LIGHT

FAZE LIGHTING

Linear Light

F-HAN-3301
40W

F-HAN-3305
30W, 50W, 70W

F-HAN-3303
40W

F-HAN-3307
40W

F-HAN-3311
40W

F-HAN-3309
40W

F-HAN-3313
30W, 40W, 60W
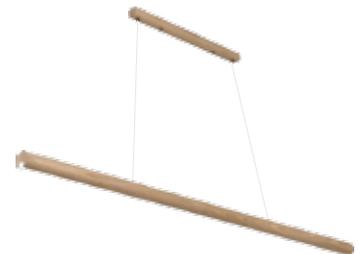
F-HAN-3315
20W

Product Featurers

— Inpute voltage: AC220-240V
— Standard CCT: 2700-7000K
— Color rendering: CRI >80
— Flicker free driver
— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
  Bridgelux/Epistar/Sanan/Mulinsan
— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
  accroding to the weight, chips & driver brand)

Application Areas

— Office
— Retail Shops
— Hospitals
— Residential
— Commercial

FAZE
L I G H T I N G

Linear Light

F-HAN-3317
35W

F-HAN-3321
24W

F-HAN-3319
24W

F-HAN-3323
40W

F-HAN-3327
54W

F-HAN-3325
45W

F-HAN-3329
40W

F-HAN-3333
20W, 40W

F-HAN-3331
40W

Product Featurers

— Inpute voltage: AC220-240V
— Standard CCT: 2700-7000K
— Color rendering: CRI >80
— Flicker free driver
— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
Bridgelux/Epistar/Sanan/Mulinsan
— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
accroding to the weight, chips & driver brand)

Application Areas

— Office
— Retail Shops
— Hospitals
— Residential
— Commercial

FAZE
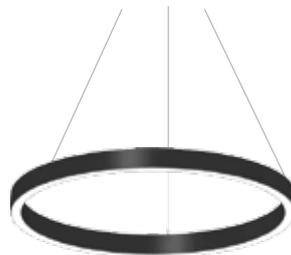LIGHTING

F-PAL-3801

6W, 12W, 18W, 24W
(Both Square & Round type)

F-PAL-3803

6W, 12W, 18W, 24W
(Both Square & Round type)

F-PAL-3805

6W, 12W, 18W, 24W
(Both Square & Round type)
(Black & White)

F-PAL-3807

6W, 12W, 18W, 24W
(Both Square & Round type)

Panel Light

F-PAL-3809

6W, 12W, 18W, 24W
Micro sensor
(Both Square & Round type)

F-PAL-3850

6W, 12W, 18W, 24W
Motion sensor
(Both Square & Round type)

F-PAL-3811

6W, 12W, 18W, 24W

Product Featurers

— Inpute voltage: AC220-240V
— Standard CCT: 2700-7000K
— Color rendering: CRI >80
— Flicker free driver
— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
   Bridgelux/Epistar/Sanan/Mulinsan
— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
   accroding to the weight, chips & driver brand)

Application Areas

— Office
— Retail Shops
— Hospitals
— Residential
— Commercial

FAZE
LIGHTING

Panel Light

F-PAL-3813
36W, 40W, 48W

F-PAL-3815
36W, 40W, 48W

F-PAL-3817
48W

F-PAL-3819
36W, 40W, 48W

Product Featurers

— Inpute voltage: AC220-240V
— Standard CCT: 2700-7000K
— Color rendering: CRI >80
— Flicker free driver
— IP rating: IP20/IP44/IP54
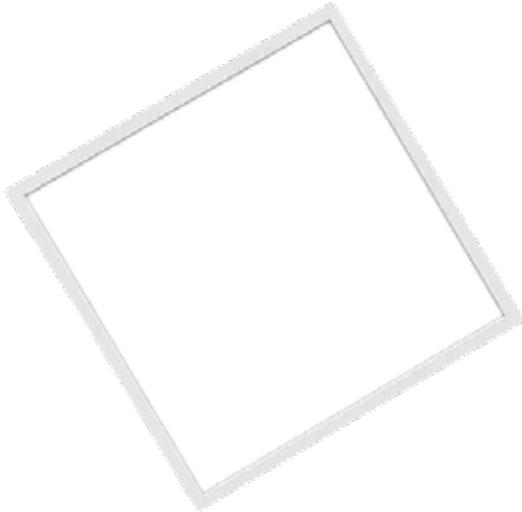
Chips & Driver

— LED Chips : Philips/Osram/
  Bridgelux/Epistar/Sanan/Mulinsan
— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
  accroding to the weight, chips & driver brand)

Application Areas

— Office
— Retail Shops
— Hospitals
— Residential
— Commercial

LED WALL LIGHT

Wall Light

F-WAL-4001
7W

F-WAL-4003
3W, 5W

F-WAL-4005
12W

F-WAL-4007
5W

F-WAL-4009
6W

F-WAL-4011
10W, 15W

F-WAL-4013
3W, 5W

F-WAL-4015
3W, 5W

F-WAL-4017
3W, 5W

Product Featurers

— Inpute voltage: AC220-240V
— Standard CCT: 2700-7000K
— Color rendering: CRI >80
— Flicker free driver
— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
Bridgelux/Epistar/Sanan/Mulinsan
— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
accroding to the weight, chips & driver brand)

Application Areas

— Office
— Retail Shops
— Hospitals
— Residential
— Commercial

LED MIRROR LIGHT

Mirror Light

F-MIL-4201
12W

F-MIL-4203
10W

F-MIL-4213
15W

F-MIL-4205
10W, 15W

F-MIL-4207
10W, 15W

F-MIL-4213
15W

F-MIL-4209
10W, 15W

F-MIL-4211
12W

Product Featurers

— Inpute voltage: AC220-240V

— Standard CCT: 2700-7000K

— Color rendering: CRI >80

— Flicker free driver

— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
Bridgelux/Epistar/Sanan/Mulinsan

— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
accroding to the weight, chips & driver brand)

Application Areas

— Office

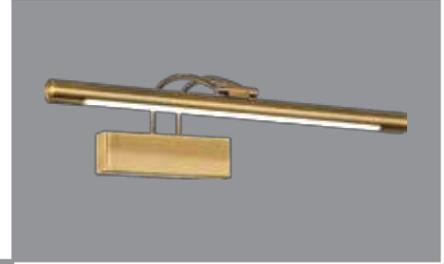— Retail Shops
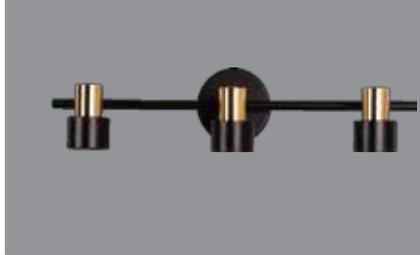
— Hospitals

— Residential

— Commercial

LED STRIP LIGHT

F-SL-4401

F-SL-4403

F-SL-4405

F-SL-4407

F-SL-4409

F-SL-44011

Product Featurers

— Inpute voltage: AC220-240V
— Standard CCT: 2700-7000K
— Color rendering: CRI >80
— Flicker free driver
— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
  Bridgelux/Epistar/Sanan/Mulinsan
— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
  accroding to the weight, chips & driver brand)

Application Areas

— Office
— Retail Shops
— Hospitals
— Residential
— Commercial

LED EXPLOSION FROOF LIGHT

FAZE
L I G H T I N G

F-EXPL-4801
10W, 20W, 30W, 40W

F-EXPL-4803
100W, 200W

F-EXPL-4805
18W, 36W

Explosion Proof Light

F-EXPL-4807
100W, 200W

F-EXPL-4809
50W, 100W, 150W

Product Featurers

— Inpute voltage: AC220-240V
— Standard CCT: 2700-7000K
— Color rendering: CRI >80
— Flicker free driver
— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
  Bridgelux/Epistar/Sanan/Mulinsan
— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
  accroding to the weight, chips & driver brand)

Application Areas

— Warehouse
— Garage
— Stores
— Factories
— Manufacturing Plant

CHANDELIER LIGHT

FAZE
L I G H T I N G

F-CHL-4909
40W

F-CHL-4909
60W

F-CHL-4911
8x9W LED bulb

F-CHL-4913
60W

Chandelier Light

Product Featurers

— Inpute voltage: AC220-240V
— Standard CCT: 2700-7000K
— Color rendering: CRI >80
— Flicker free driver
— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
  Bridgelux/Epistar/Sanan/Mulinsan
— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
  accroding to the weight, chips & driver brand)

Application Areas

— Office
— Retail Shops
— Hospitals
— Residential
— Commercial

LED BULB

FAZE
LIGHTING

LED BULB

F-LB-5005
5W, 7W, 9W,

F-LB-5001
3W, 5W, 7W, 9W, 12W,15W,
18W, 20W, 30W, 40W

F-LB-5003
12W,15W,18W,
20W, 30W, 40W

F-LB-5007
7W, 12W,

F-LB-5009
3W, 5W, 7W

F-LB-5013
20W

F-LB-5011
5W, 7W, 9W,

F-LB-5015 (Par-38)
35W, 50W

F-LB-5009
3W, 5W, 7W

F-LB-5017 (par-56)
45W

Product Featurers

— Inpute voltage: AC220-240V
— Standard CCT: 2700-7000K
— Color rendering: CRI >80
— Flicker free driver
— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
  Bridgelux/Epistar/Sanan/Mulinsan
— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
  accroding to the weight, chips & driver brand)

Application Areas

— Office
— Retail Shops
— Hospitals
— Residential
— Commercial

FAZE
LIGHTING

LED EMERGENCY & EXIT LIGHT

FAZE
LIGHTING

Emergency & Exit Light

F-EML-5301
2x3W

F-EML-5305
2x3W

F-EML-5303
2x3W

F-EML-5307
2x3W

F-EXL-5361
3W

F-EXL-5363
3W

F-EXL-5367
3W

F-EXL-5369
3W

F-EXL-5365
3W

Product Featurers

— Inpute voltage: AC220-240V
— Standard CCT: 2700-7000K
— Color rendering: CRI >80
— Flicker free driver
— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
  Bridgelux/Epistar/Sanan/Mulinsan
— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
  accroding to the weight, chips & driver brand)

Application Areas

— Office
— Retail Shops
— Hospitals
— Residential

FAZE
LIGHTING

Inground Light

F-INGL-7601
1W, 3W, 6W
12W, 18W

**F-INGL-7603**
3W, 6W, 18W,
24W, 36W

F-INGL-7605
3W, 5W, 7W

F-INGL-7607
5W, 7W, 9W

F-INGL-7609
1W, 3W, 16W, 21W

F-INGL-7611
1W, 3W

F-INGL-7613
5W, 10W, 20W

F-INGL-7615
7W

F-INGL-7617
3W, 6W, 18W,
24W, 36W

Product Featurers

— Inpute voltage: AC220-240V

— Standard CCT: 3000-7000K

— Color rendering: CRI >80

— Flicker free driver

— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
Bridgelux/Epistar/Sanan/Mulinsan

— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
accroding to the weight, chips & driver brand)

Application Areas

— Landscaping

— Pathways

— Drive ways

— Architectural Elements

— Buildings

FAZE
L I G H T I N G

F-OSL-7801
3W, 5W
ON/OFF or DMX

F-OSL-7803
9W, 12W, 15W
ON/OFF or DMX

F-OSL-7805
3W, 5W, 9W, 18W

F-OSL-7807
12W, 15W
ON/OFF or DMX

F-OSL-7809
12W, 18W, 24W,
36W, 48W

F-OSL-7811
12W, 15W, 24W,
36W, 45W
ON/OFF or DMX

F-OSL-7813
5W, 10W, 15W

F-OSL-7815
3W, 5W

F-OSL-7817
5W, 7W

F-OSL-7819
3W, 5W

Outdoor Spot Light

Product Featurers

— Inpute voltage: AC220-240V

— Standard CCT: 3000-7000K

— Color rendering: CRI >80

— Flicker free driver

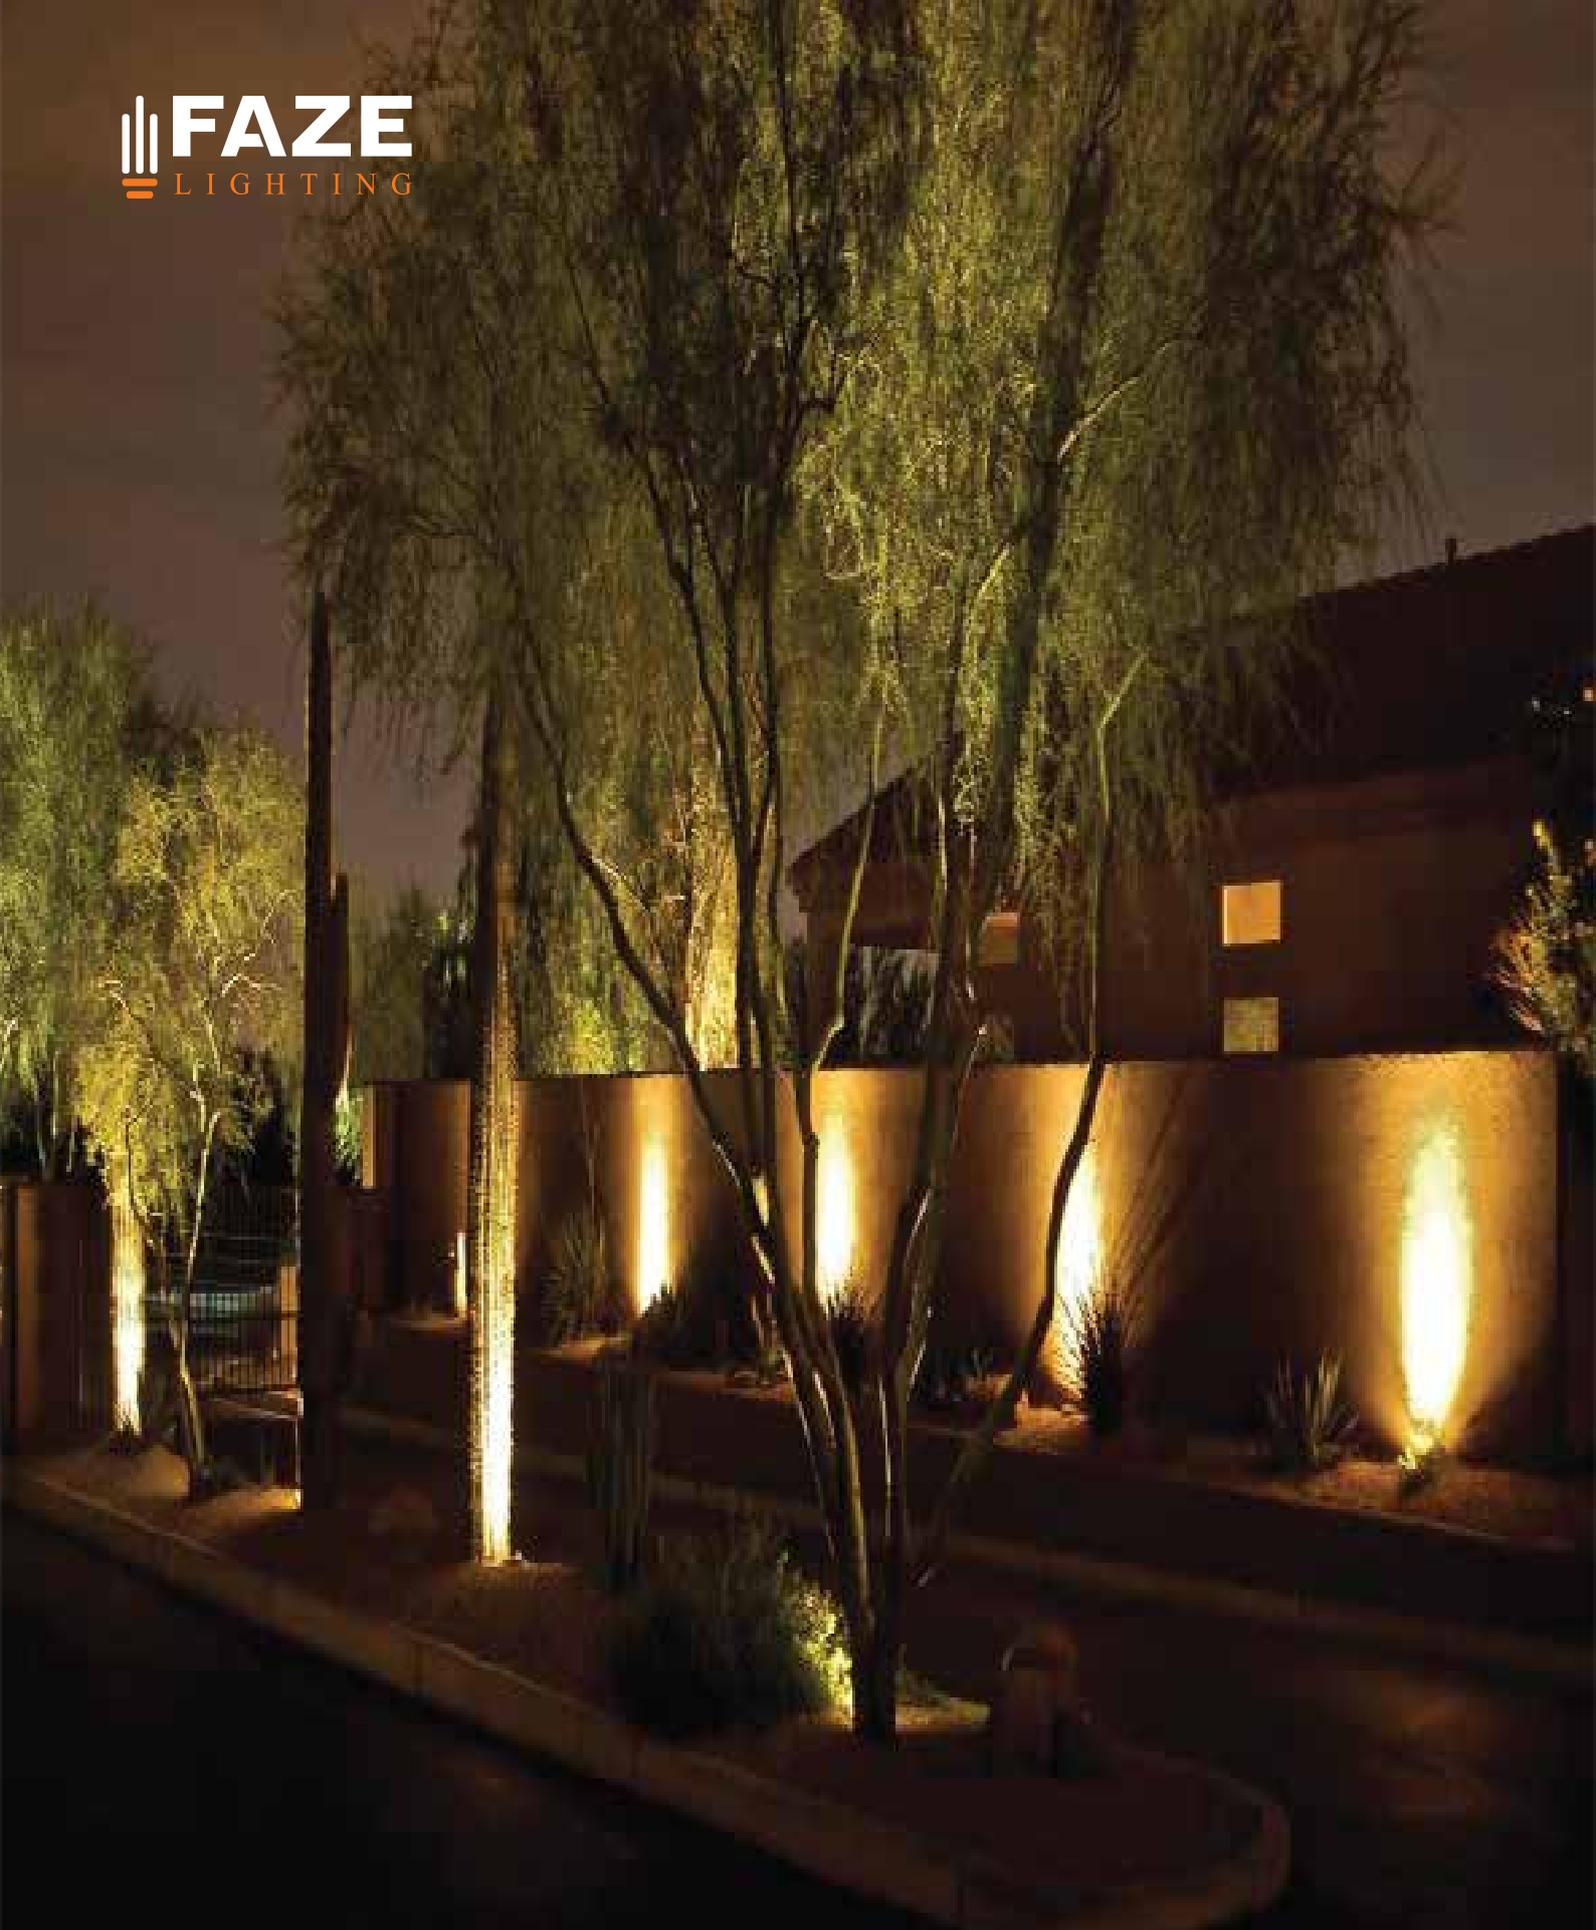— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
Bridgelux/Epistar/Sanan/Mulinsan

— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
accroding to the weight, chips & driver brand)

Application Areas

— Garden

— Uplight Trees

— Fountains Pathways

— Architectural Elements

— Buildings

LED FOOT LIGHT

FAZE
L I G H T I N G

F-FOL-8001
3W, 5W

F-FOL-8003
4W, 6W, 8W
ON/OFF or DMX

F-FOL-8005
3W

F-FOL-8007
3W, 5W

F-FOL-8009
3W
ON/OFF or DMX

F-FOL-8011
3W

F-FOL-8013
6W

F-FOL-8015
3W, 6W
ON/OFF or DMX

F-FOL-8017
6W, 12W

F-FOL-8019
6W, 12W

F-FOL-8021
3W

F-FOL-8023
3W

Foot Light

Product Featurers

— Inpute voltage: AC220-240V
— Standard CCT: 3000-7000K
— Color rendering: CRI >80
— Flicker free driver
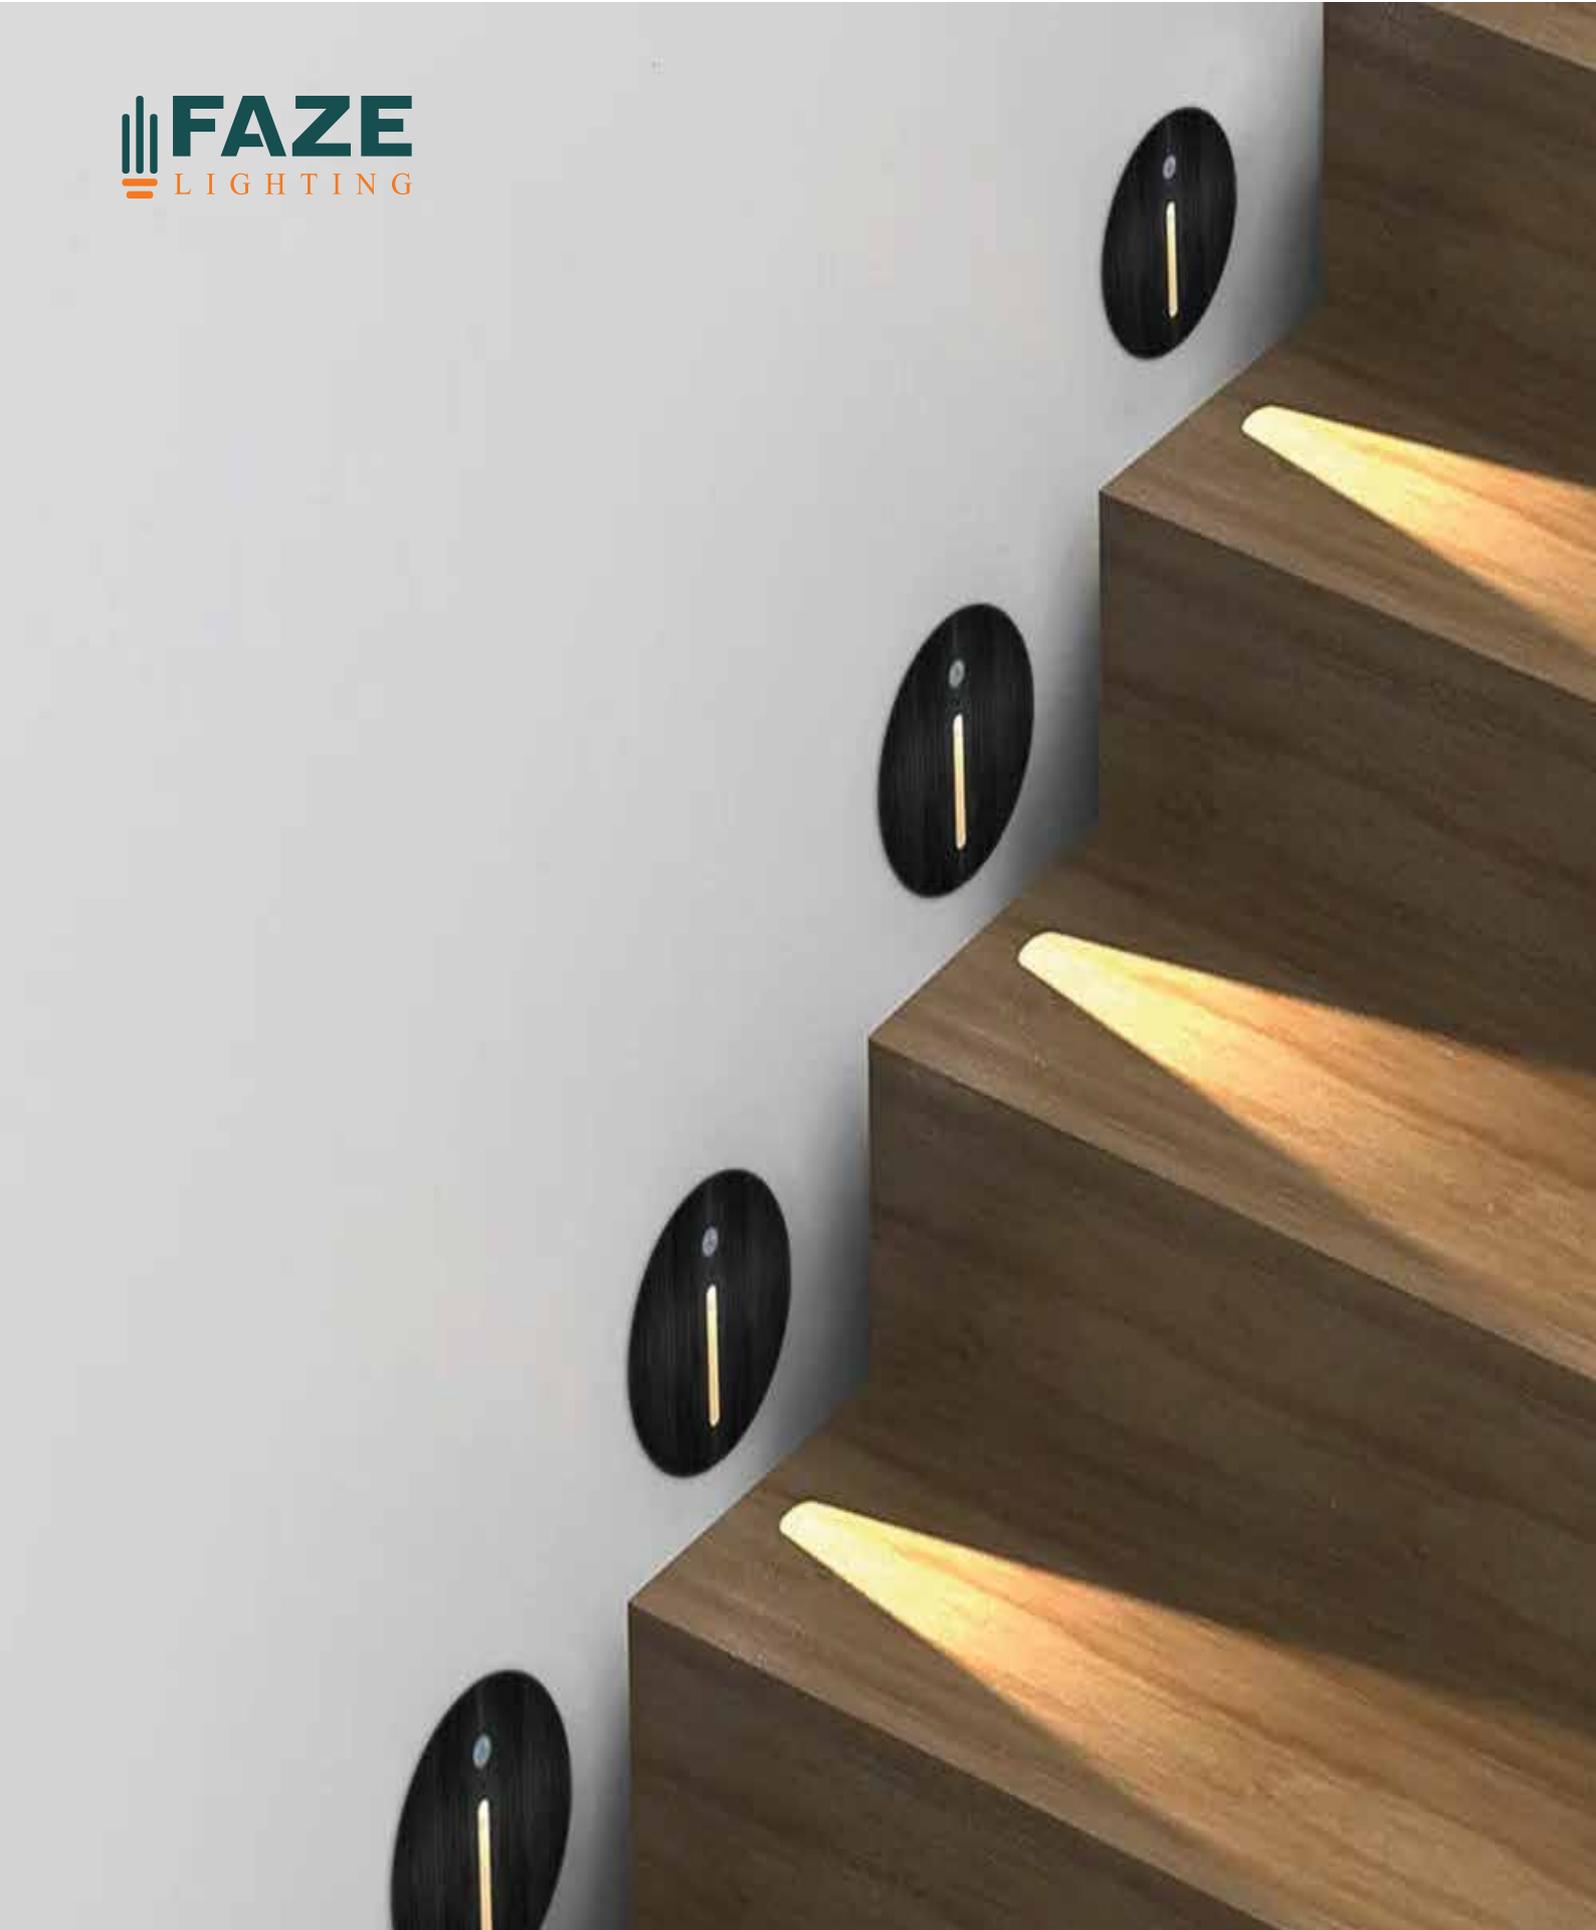— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
  Bridgelux/Epistar/Sanan/Mulinsan
— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
  accroding to the weight, chips & driver brand)

Application Areas

— Passage
— Stairecase
— Driveways
— Pathways

LED UNDERWATER LIGHT

FAZE
L I G H T I N G

Underwater Light

F-UWL-8151
6W, 12W,
18W, 24W

F-UWL-8155
3W, 6W,
12W, 18W

F-UWL-8153
6W, 12W,
18W, 24W

F-UWL-8157
6W, 9W,
12W, 18W

F-UWL-8159
3W, 6W,
12W, 18W

F-UWL-8163
12W, 18W,
24W, 36W

F-UWL-8161
6W, 9W,
12W, 18W

F-UWL-8165
12W, 18W,
24W, 36W

Product Featurers

— Inpute voltage: AC220-240V
— Standard CCT: 3000-7000K
— Color rendering: CRI >80
— Flicker free driver
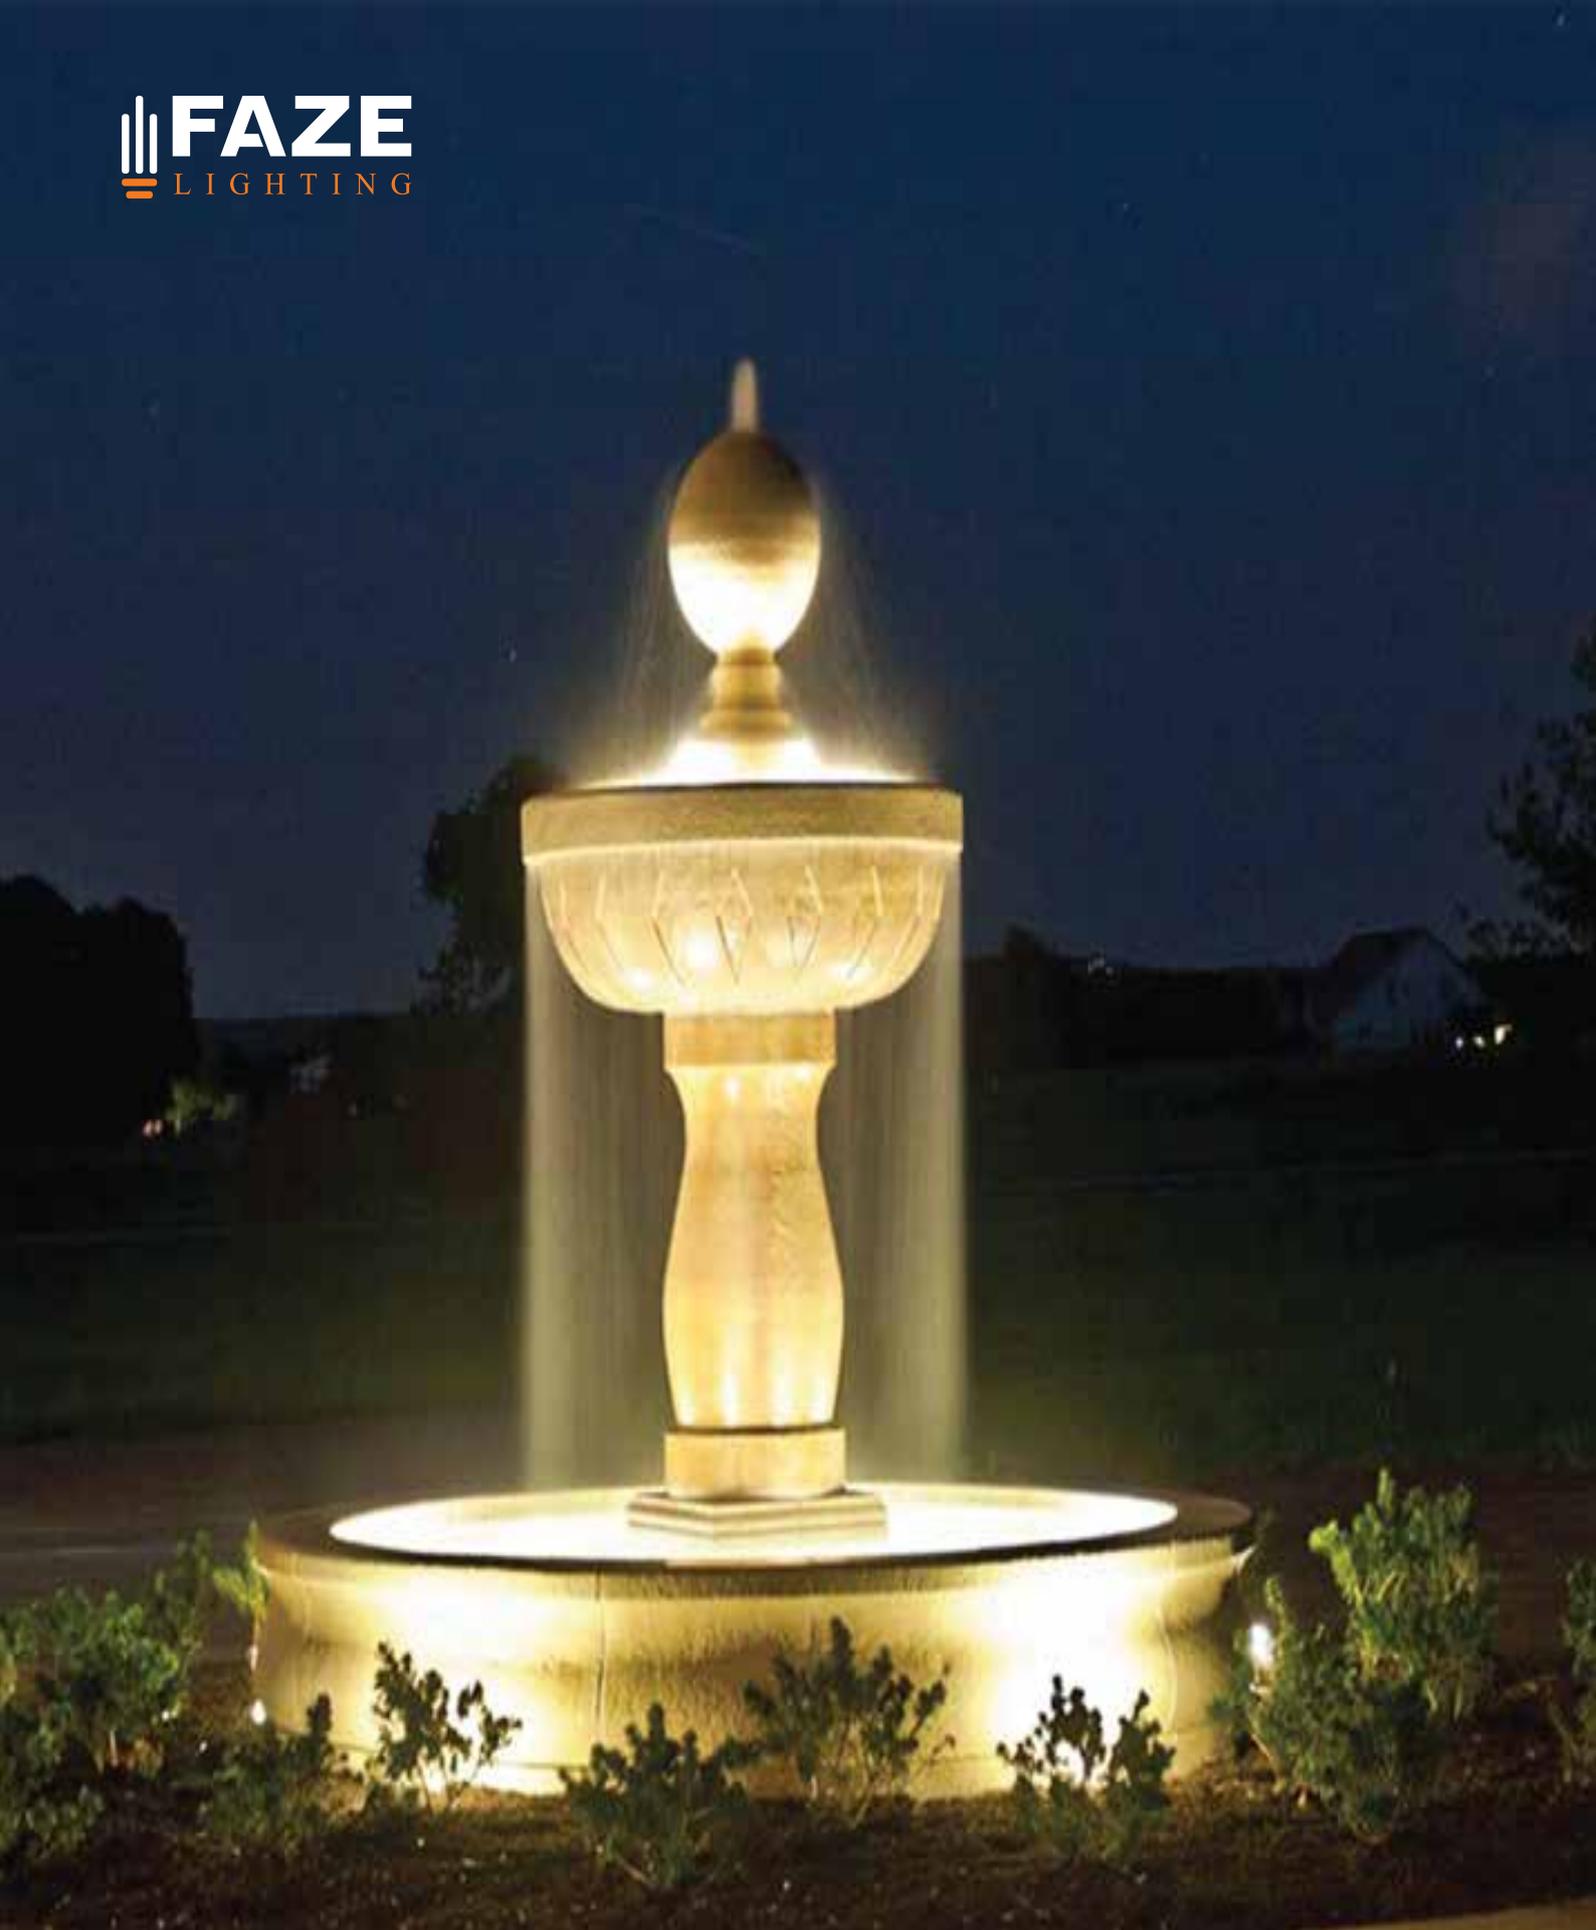— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
Bridgelux/Epistar/Sanan/Mulinsan
— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
accroding to the weight, chips & driver brand)

Application Areas

— Landscaping
— Pools
— Ponds
— Fountains designs
— Docks

FAZE LIGHTING
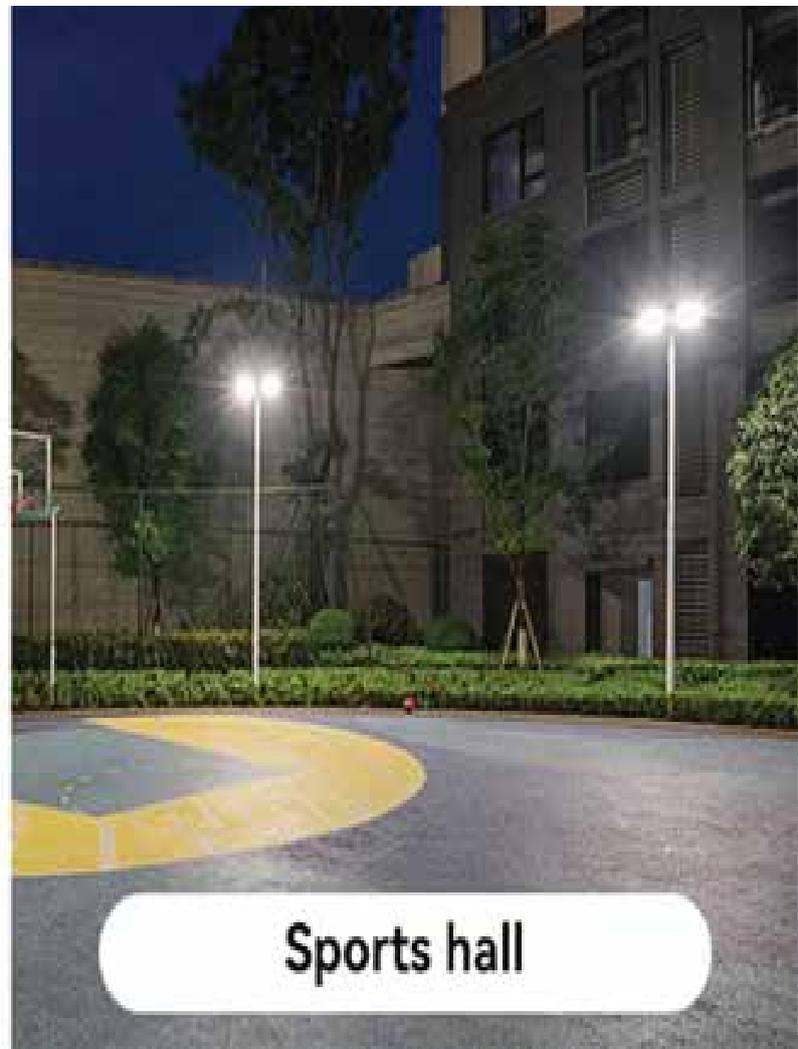
Outdoor billboard

Shop storefront

LED FLOOD LIGHT

Architectural lighting

Sports hall

FAZE
L I G H T I N G

F-FLDL-8601
100W, 200W

F-FLDL-8603
50W, 100W

F-FLDL-8605
50W, 100W, 150W,
200W, 400W

F-FLDL-8607
100w, 150w,
200w, 400w

F-FLDL-8609 (RGB)
30w, 50w, 100w, 200w

F-FLDL-8611
50W, 100W, 200W

F-FLDL-8613
50W, 100W,
150W, 200W

F-FLDL-8615
50W, 100W, 150W,
200W, 400W

F-FLDL-8617
50W, 100W,
150W, 200W

Flood Light

Product Featurers

— Inpute voltage: AC220-240V
— Standard CCT: 3000-7000K
— Color rendering: CRI >80
— Flicker free driver
— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
   Bridgelux/Epistar/Sanan/Mulinsan
— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
   accroding to the weight, chips & driver brand)

Application Areas

— Outdoor events
— Sports arenas
— Parking
— Ports

LED STREET LIGHT

FAZE
L I G H T I N G

Street Light

F-STRL-8403
50W, 100W, 150W, 200W

F-STRL-8401
50W, 100W, 150W, 200W

F-STRL-8405
50W, 100W, 150W, 200W

F-STRL-8407
50W, 100W, 150W, 200W

F-STRL-8409
50W, 100W, 150W, 200W

F-STRL-8411
50W, 100W, 150W

F-STRL-8413
50W, 100W, 150W, 200W

F-STRL-8415
50W, 100W, 150W, 200W

F-STRL-8417
50W, 100W, 150W

Product Featurers

— Inpute voltage: AC220-240V

— Standard CCT: 3000-7000K

— Color rendering: CRI >80

— Flicker free driver

— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
Bridgelux/Epistar/Sanan/Mulinsan

— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
accroding to the weight, chips & driver brand)

Application Areas

— Road

— City lighting

— Public area lighting

LED TREE LIGHT

FAZE
L I G H T I N G

Tree Light

F-TREL-8201
12W, 18W, 24W
ON/OFF or DMX

F-TREL-8203
3W, 4W
ON/OFF or DMX

F-TREL-8205
16W, 36W, 48W
ON/OFF or DMX

F-TREL-8207
3W, 6W
ON/OFF or DMX

F-TREL-8209
12W, 15W
ON/OFF or DMX

Product Featurers

— Inpute voltage: AC220-240V
— Standard CCT: 3000-7000K
— Color rendering: CRI >80
— Flicker free driver
— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
   Bridgelux/Epistar/Sanan/Mulinsan
— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
   accroding to the weight, chips & driver brand)

Application Areas

— Garden
— Uplight trees
— Architectural elements

LED BOLLARD LIGHT

FAZE LIGHTING

Bollard Light

F-BOL-7001
12W
H-1000mm

F-BOL-7003
6W
H-600mm

F-BOL-7005
7W
H-450mm
H-750mm

F-BOL-7007
18W
H-450mm
H-750mm

F-BOL-7009
5W
H-750mm

F-BOL-7011
6W
H-450mm
H-600mm

F-BOL-7013
10W
H-200mm
H-600mm

F-BOL-7015
10W
H-600mm
H-800mm

F-BOL-7017
12W
H-200mm
H-650mm

F-BOL-7019
9W, 18W
H-450mm

F-BOL-7021
9W, 18W
H-450mm

F-BOL-7023
10W
H-600mm

Product Featurers

— Inpute voltage: AC220-240V
— Standard CCT: 3000-7000K
— Color rendering: CRI >80
— Flicker free driver
— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
   Bridgelux/Epistar/Sanan/Mulinsan
— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
   accroding to the weight, chips & driver brand)

Application Areas

— Garden
— Architech elements
— Public area lighting
— Pathways

Bollard Light

F-BOL-7025
12W
H-1000mm

F-BOL-7027
12W, 18W
H-450mm
D-200mm

F-BOL-7029
12W
H-980mm
D-300mm

F-BOL-7031
12W
H-900mm
H-207mm

F-BOL-7033
12W
H-330mm
D-108mm

F-BOL-7035
12W, 18W
H-404mm
W-200mm
P-75mm

F-BOL-7037
12W
H-800mm
W-200mm
P-100mm

F-BOL-7039
6W, 12W
H-800mm

F-BOL-7041
12W
H-100mm

F-BOL-7043
12W
H-135mm
D-150mm

F-BOL-7045
6W
H-664mm
D-600mm

F-BOL-7047
10W
H-600mm

Product Featurers

— Inpute voltage: AC220-240V
— Standard CCT: 3000-7000K
— Color rendering: CRI >80
— Flicker free driver
— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
Bridgelux/Epistar/Sanan/Mulinsan
— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
accroding to the weight, chips & driver brand)

Application Areas

— Garden
— Architech elements
— Public area lighting
— Pathways

Bollard Light

F-GARL-7401
30W, 50W
H-3M/5M/6M

F-GARL-7403
30W, 50W
H-3M/5M/6M

F-GARL-7405
30W, 50W
H-3M/5M/6M

F-GARL-7407
20W, 30W, 40W, 50W
H-2M/3M

F-GARL-7409
20W, 30W, 40W, 50W
H-2M/3M

F-GARL-7411
20W, 30W, 40W, 50W
H-2M/3M

F-GARL-7413
H-1050mm

Product Featurers

— Inpute voltage: AC220-240V
— Standard CCT: 3000-7000K
— Color rendering: CRI >80
— Flicker free driver
— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
Bridgelux/Epistar/Sanan/Mulinsan
— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
accroding to the weight, chips & driver brand)

Application Areas

— Garden
— Architech elements
— Public area lighting
— Pathways

GARDEN, POLE & GATE LIGHT

Garden Light

F-GARL-7415
H-2500mm

F-GARL-7417
H-2500mm

F-GARL-7419
H-2500mm

F-GARL-7421
H-2500mm

F-GARL-7423
H-2500mm

F-GARL-7425
H-2500mm

F-GARL-7427
H-3000mm

F-GARL-7429
H-6000mm

Product Featurers

— Inpute voltage: AC220-240V

— Standard CCT: 3000-7000K

— Color rendering: CRI >80

— Flicker free driver

— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
   Bridgelux/Epistar/Sanan/Mulinsan

— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
   accroding to the weight, chips & driver brand)

Application Areas

— Garden

— Highways

— Resort

— Bridge

FAZE LIGHTING

Garden Light

F-GAL-7201

F-GAL-7203

F-GAL-7205

F-GAL-7209

F-GAL-7207

F-GAL-7213

F-GAL-7211

Product Featurers

- Inpute voltage: AC220-240V
- Standard CCT: 3000-7000K
- Color rendering: CRI >80
- Flicker free driver
- IP rating: IP20/IP44/IP54

Chips & Driver

- LED Chips : Philips/Osram/
  Bridgelux/Epistar/Sanan/Mulinsan
- Driver : Osram/Philips/Done/CE Standard

Warranty

- 1-3 years (Product warranty & price varies
  accroding to the weight, chips & driver brand)

Application Areas

- Gate
- Building

LED FACADE LIGHTING

What is facade lighting:

Facade lighting is the technique of illuminating the exterior surfaces of buildings to enhance their appearance, highlight architectural features, and improve nighttime visibility. It's a form of architectural lighting that focuses on showcasing the design elements of a building's facade, such as its materials, textures, and geometry.

Types of facade lighting:

Spotlights:
Used for highlighting specific architectural features with a focused beam of light.

Floodlights:
Provide broader illumination across a larger area of the facade.

Wall washers:
Create a smooth, even wash of light across a vertical surface.

Up lights:
Illuminate the facade from below, highlighting textures and creating dramatic shadows.

Linear lights:
Used for outlining architectural features or creating dynamic lighting effects.

In essence, facade lighting is a powerful tool that combines artistry and technology to transform buildings into captivating nighttime landmarks while also enhancing their functionality and safety.

FAZE
L I G H T I N G

F-FACL-9001
2x6W, 2x10W

F-FACL-9003
24W, 27W, 48W

F-FACL-9005
24W, 32W, 48W
ON/OFF or DMX512

F-FACL-9007
15W, 20W, 30W, 48W

F-FACL-9013
12W, 18W, 24W
ON/OFF or DMX512

F-FACL-9015
12W, 18W, 40W
ON/OFF or DMX512

Facade Wall Light

Product Featurers

— Inpute voltage: AC220-240V
— Standard CCT: 2200-7000K, RGB
— Color rendering: CRI >80
— Flicker free driver
— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
  Bridgelux/Epistar/Sanan/Mulinsan
— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
  accroding to the weight, chips & driver brand)

Application Areas

— Garden
— Uplight Trees
— Fountains Pathways
— Architectural Elements
— Buildings

FAZE
LIGHTING

Facade Wall Light

F-FACL-9017
2x6W

F-FACL-9019
12W, 24W, 42W, 60W

F-FACL-9021
12W

F-FACL-9023
6W, 8W, 12W
ON/OFF or DMX512

F-FACL-9011
5W
ON/OFF or DMX512

F-FACL-9009
2x6W

Product Featurers

— Inpute voltage: AC220-240V
— Standard CCT: 2200-7000K, RGB
— Color rendering: CRI >80
— Flicker free driver
— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
  Bridgelux/Epistar/Sanan/Mulinsan
— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
  accroding to the weight, chips & driver brand)

Application Areas

— Garden
— Uplight Trees
— Fountains Pathways
— Architectural Elements
— Buildings

FAZE
LIGHTING

F-FACL-9025
24W
ON/OFF or DMX512

F-FACL-9027
24W/M
ON/OFF or DMX512

F-FACL-9029
24W
ON/OFF or DMX512

Facade Wall Light

F-FACL-9031
12W, 15W
ON/OFF or DMX512

Facade Wall Washer Light

Product Featurers
— Inpute voltage: AC220-240V
— Standard CCT: 2200-7000K, RGB
— Color rendering: CRI >80
— Flicker free driver
— IP rating: IP20/IP44/IP54

Chips & Driver
— LED Chips : Philips/Osram/ Bridgelux/Epistar/Sanan/Mulinsan
— Driver : Osram/Philips/Done/CE Standard

Warranty
— 1-3 years (Product warranty & price varies accroding to the weight, chips & driver brand)

Application Areas
— Garden
— Uplight Trees
— Fountains Pathways
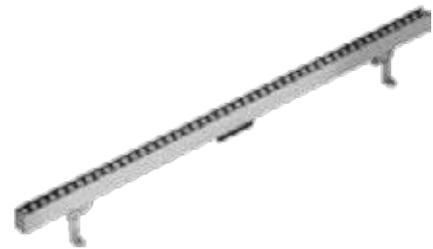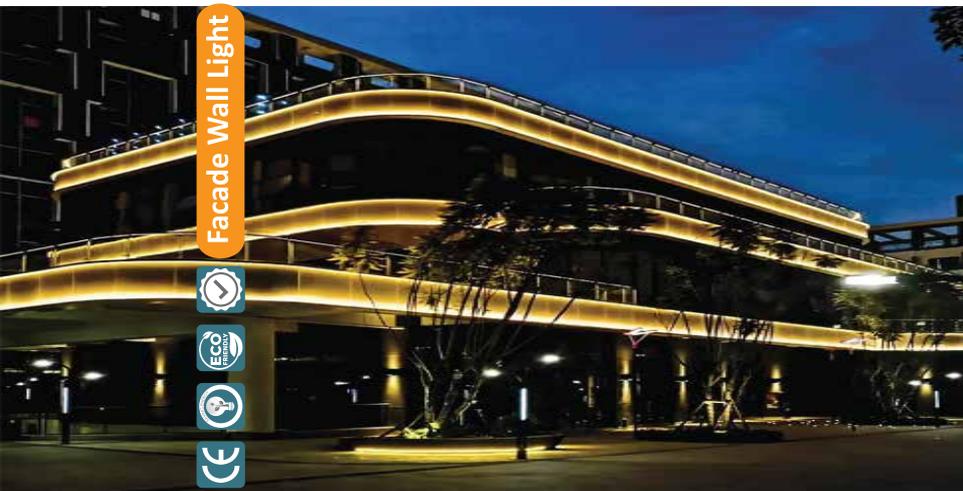— Architectural Elements
— Buildings

FAZE
LIGHTING

Facade Flood Light

F-FACL-9033
10W, 20W, 30W
ON/OFF

F-FACL-9035
24W, 48W
ON/OFF or DMX512

F-FACL-9037
12W, 18W, 24W
36W, 48W
ON/OFF or DMX512

F-FACL-9039
24W, 48W
ON/OFF or DMX512

F-FACL-9041
120W, 180W, 270W, 300W, 500W, 600W
ON/OFF or DMX512

Product Featurers

— Inpute voltage: AC220-240V
— Standard CCT: 2200-7000K, RGB
— Color rendering: CRI >80
— Flicker free driver
— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
   Bridgelux/Epistar/Sanan/Mulinsan
— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
   accroding to the weight, chips & driver brand)

Application Areas

— Garden
— Uplight Trees
— Fountains Pathways
— Architectural Elements
— Buildings

FAZE
L I G H T I N G

F-FACL-9043
6W
ON/OFF or DMX512

F-FACL-9045
10W
ON/OFF or DMX512

F-FACL-9047
5W, 10W
ON/OFF or DMX512

F-FACL-9049
10W
ON/OFF or DMX512

Facade Window Trick Light

F-FACL-9051
12W, 15W, 20W
ON/OFF or DMX512

Product Featurers

— Inpute voltage: AC220-240V
— Standard CCT: 2200-7000K, RGB
— Color rendering: CRI >80
— Flicker free driver
— IP rating: IP20/IP44/IP54

Chips & Driver

— LED Chips : Philips/Osram/
Bridgelux/Epistar/Sanan/Mulinsan
— Driver : Osram/Philips/Done/CE Standard

Warranty

— 1-3 years (Product warranty & price varies
accroding to the weight, chips & driver brand)

Application Areas

— Garden
— Uplight Trees
— Fountains Pathways
— Architectural Elements
— Buildings

Lighting automation:

Lighting automation refers to the use of technology to control and manage lighting systems often in homes or buildings ,in a smart and efficient way This involves using automated systems to turn lights on or off adjust brightness, and even change colors, all based on pre-set schedules, sensors, or user input.

Key Aspects of Lighting Automation:

Control:
Instead of manual switches , lighting automation allows for control through various means such as:
> **Mobile apps:** Controlling lights remotely from a smartphone or tablet.
> **Voice assistants:** Using voice commands to control lights (e.g., Alexa, Google Assistant).
> **Sensors:** Automatically adjusting lights based on motion detection, ambient light levels, or other environmental factors
> **Timers and schedules:** Setting specific times for lights to turn on or off.

Features:
Automation can offer a range of features beyond simple on/off control, including:
> **Dimming:** Adjusting the brightness of lights.
> **Color temperature changes:** Modifying the warmth or coolness of the light often to support circadian rhythms.
> **Scene settings:** Creating pre-set lighting configurations for different moods or activities
> (e.g., movienight, dinner party).

Benefits:
> **Convenience:** Eliminates the need to manually control lights in many situations.
> **Energy savings:** Reduces energy consumption by optimizing lighting usage based on occupancy and ambient light.
> **Enhanced security:** Automated lighting can deter intruders by creating the impression of occupancy.
> **Improved comfort and ambiance:** Personalized lighting settings can create a more comfortable and enjoyable living environment.
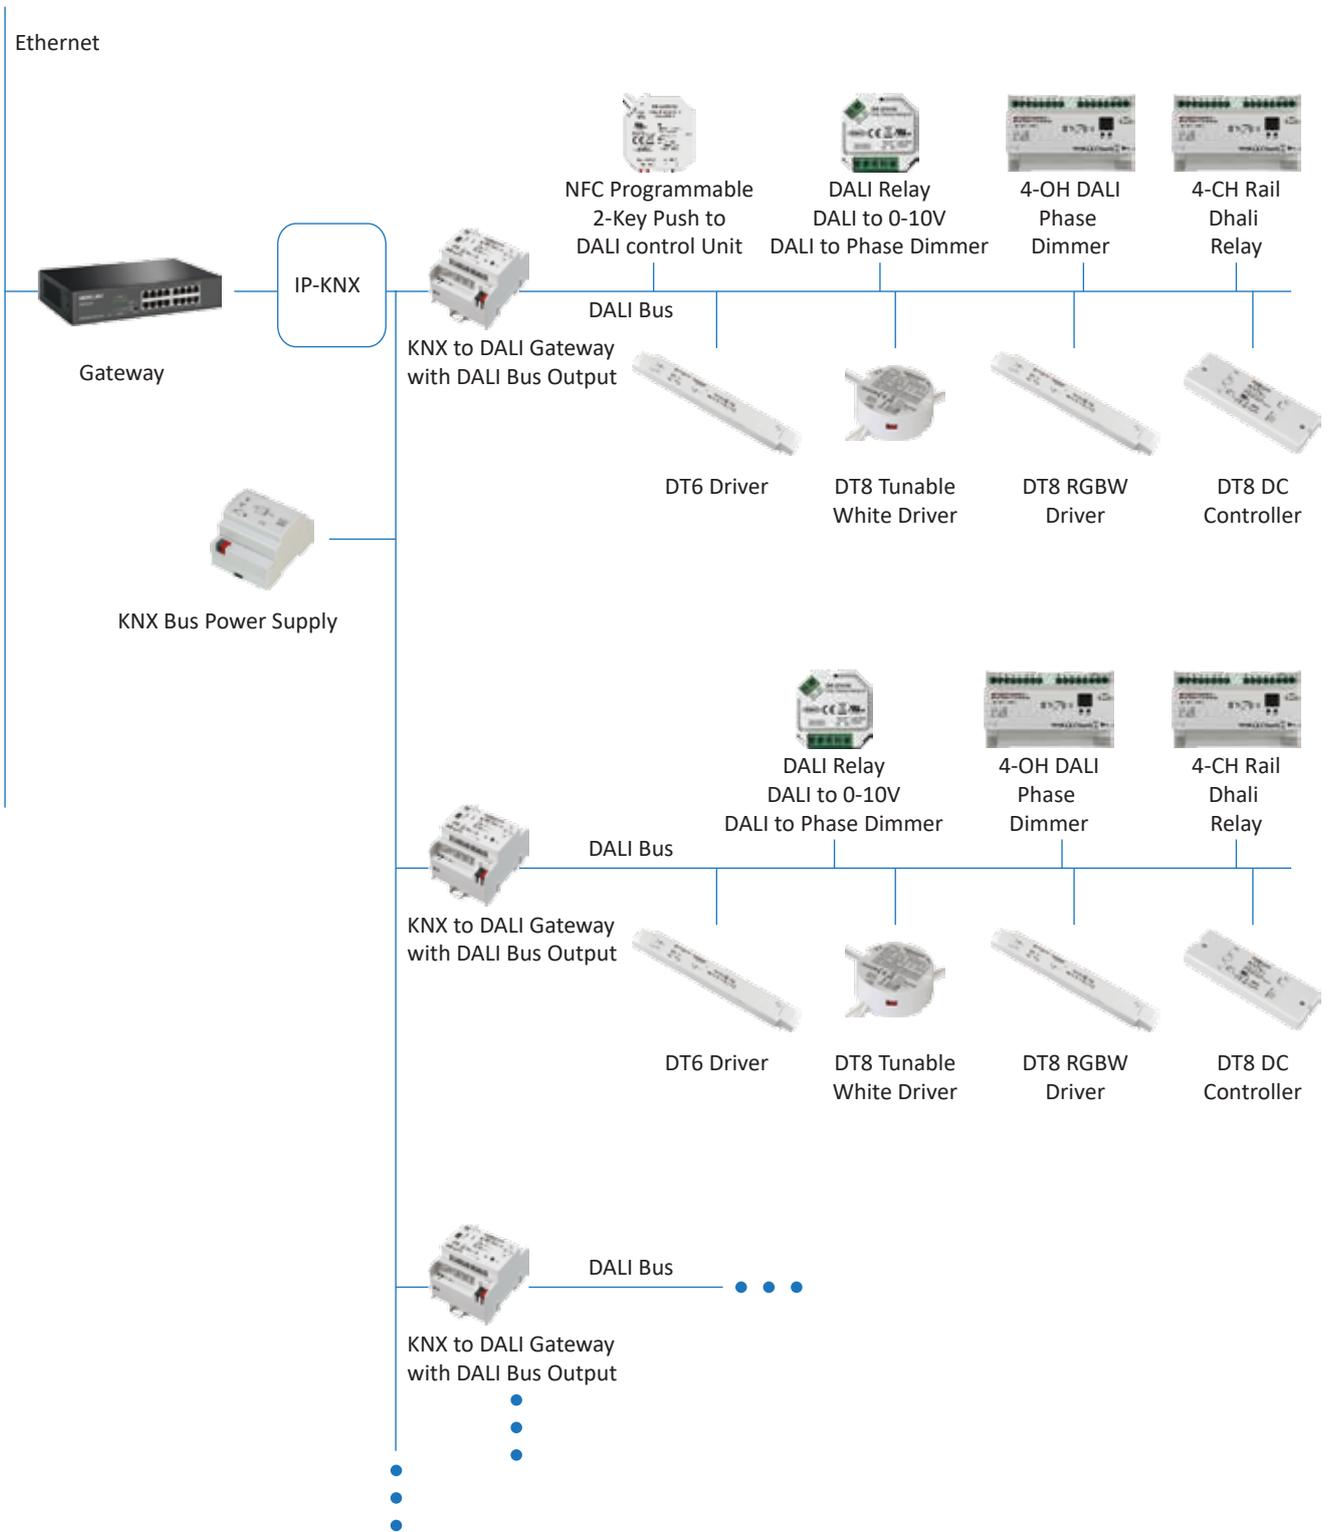
Examples of use:
> **Motion-activated lights in hallways and stairways:** Lights turn on as you enter a space and off when you leave.
> **Automated lighting schedules for bedtime and wake-up:** Lights dim gradually in the evening and brighten in the morning to support sleep patterns.
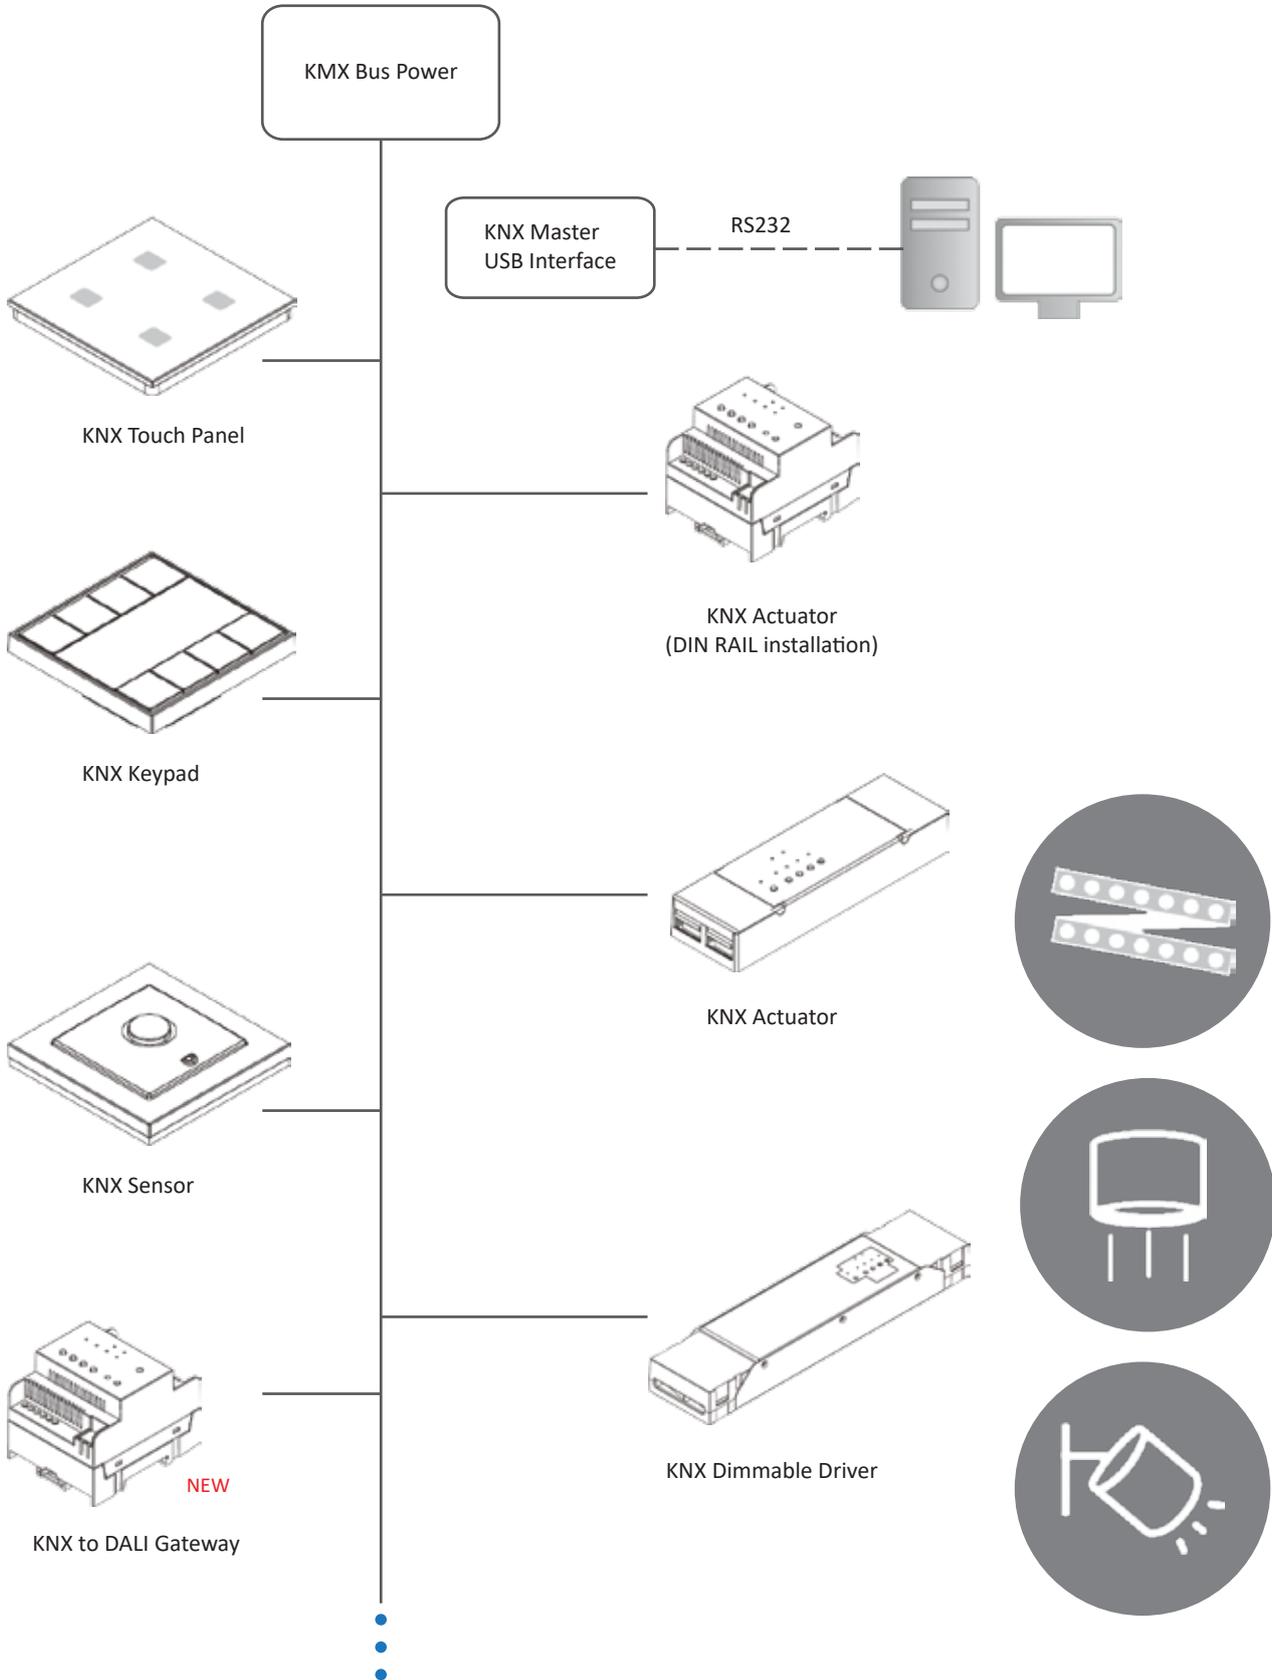> **Remote control of outdoor lights:** Turning on or off lights while away from home to deter burglars.

In essence, lighting automation is about using technology to create a more intelligent, efficient, and comfortable lighting system.

DHALI-2 System Application Solution

Ethernet

IP-KNX

Gateway

KNX Bus Power Supply

KNX to DALI Gateway
with DALI Bus Output

NFC Programmable
2-Key Push to
DALI control Unit

DALI Relay
DALI to 0-10V
DALI to Phase Dimmer

4-OH DALI
Phase
Dimmer

4-CH Rail
Dhali
Relay

DALI Bus

DT6 Driver

DT8 Tunable
White Driver

DT8 RGBW
Driver

DT8 DC
Controller

KNX to DALI Gateway
with DALI Bus Output

DALI Relay
DALI to 0-10V
DALI to Phase Dimmer

4-OH DALI
Phase
Dimmer

4-CH Rail
Dhali
Relay

DALI Bus

DT6 Driver

DT8 Tunable
White Driver

DT8 RGBW
Driver

DT8 DC
Controller

KNX to DALI Gateway
with DALI Bus Output

DALI Bus

KNX Control System

KMX Bus Power

KNX Master USB Interface

RS232

KNX Touch Panel

KNX Actuator
(DIN RAIL installation)

KNX Keypad

KNX Actuator

KNX Sensor

KNX to DALI Gateway

NEW

KNX Dimmable Driver

FAZE
LIGHTING

Control your home from anywhere in the world

Easy to install

Mini design, hidden in the junction box